







VALVE FULLY OPEN

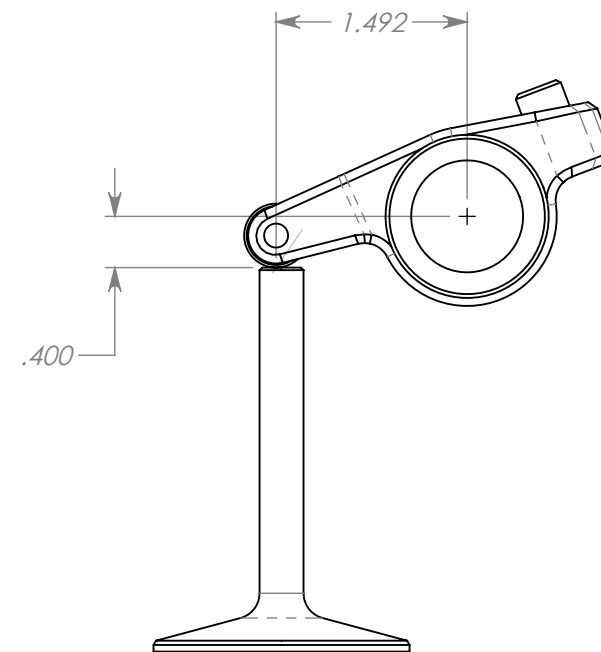

- THIS MODEL ASSUMES 0.800 LIFT AT THE VALVE
- DIMENSIONS SHOWN ARE TO THEORETICAL TANGENT POINT BETWEEN ROCKER ARM ROLLER AND VALVE STEM TIP

		UNLESS OTHERWISE SPECIFIED:			TITLE: GEOMETRY COMPARISON			
DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.		PERPENDICULARITY:	 0.001" / INCH					
DIMENSIONS ARE IN INCHES.		CONCENTRICITY:	 0.002" T.I.R.					
DE-BURR AND BREAK ALL SHARP EDGES .003 MIN.		PARALLELISM:	 0.001" / INCH					
TOLERANCES ARE:		FLATNESS:	 0.001" / INCH					
MATERIAL:	-	X.X = ±0.3 X.XX = ±0.01 X.XXX = ±0.005 ANGLES: ±0.5°	ROUGHNESS:	 125		SIZE DWG. NO. REV BCylinder Head Assy SCALE: NONE DO NOT SCALE PRINT SHEET 1 OF 1		
FINISH:	-	NOTICE THIS DRAWING CONTAINS INFORMATION WHICH IS CONFIDENTIAL AND PROPRIETARY TO PROTEDYNE, INC., AND MAY NOT BE COPIED, DIVULGED OR USED, IN PART OR AS A WHOLE, WITHOUT THE EXPRESSED WRITTEN PERMISSION OF PROTEDYNE, INC.						
FIRST USED ON:		ENGINEER	INIT.	DATE				
		DRAWN	MP	1-26-20				
		CHECKED						

1